

EASYPELL

EFFICIENT AND RELIABLE HEATING



HEATING/
COOLING



DOMESTIC
HOT WATER



EQUIPMENT

PRODUCT BROCHURE
AIR-TO-WATER HEAT PUMP



THERMAL MANAGEMENT FOR THE ENTIRE HOUSE

WATER HEATING

From the bathroom to the kitchen - the heat pump provides all the hot water for your household. Combine the system with a hot water cylinder

SUITABLE FOR ALL HEATING SYSTEMS

Regardless of whether it is a radiator, underfloor or wall heating - the heat pump works with all systems up to 70 °C.

THERMAL MANAGEMENT

The system allows an independent thermostat control. It is also possible to use an outside temperature sensor or an external heating controller.

BUFFER LOGIC

The optimal heat pump combination: heating, cooling and domestic hot water in one. The energy use can also be regulated by means of a controller.

FREE APP

All settings can be controlled via heat pump or an app. This way, you always have an overview of the actual performance and historical energy consumption data.



OUTSIDE TEMPERATURE CONTROL

The weather control ensures that the heat pump regulates the heating temperature depending on the outside temperature. Your comfortable room temperature always remains constant.

SMART PV / GRID READY

Combine it with a PV system for utilizing and storing surplus energy through dynamic heating management. Integrated SMART GRID function enables cost-effective electricity access.

CASCADE AND HYBRID FUNCTION

At any time extendable with other devices or heating sources in one complete system


COOLING FUNCTION

Simple cooling in the summer months with surface heating systems such as underfloor, wall or ceiling panels.

FLEXIBLE LOCATION OPTIONS DUE TO LOW NOISE

The double sound-insulated compressor ensures particularly low-noise operation (< 50dB) and increases flexibility when setting up. Night time sound reduction is also included.

INSTALLATION
IN ONLY
ONE DAY

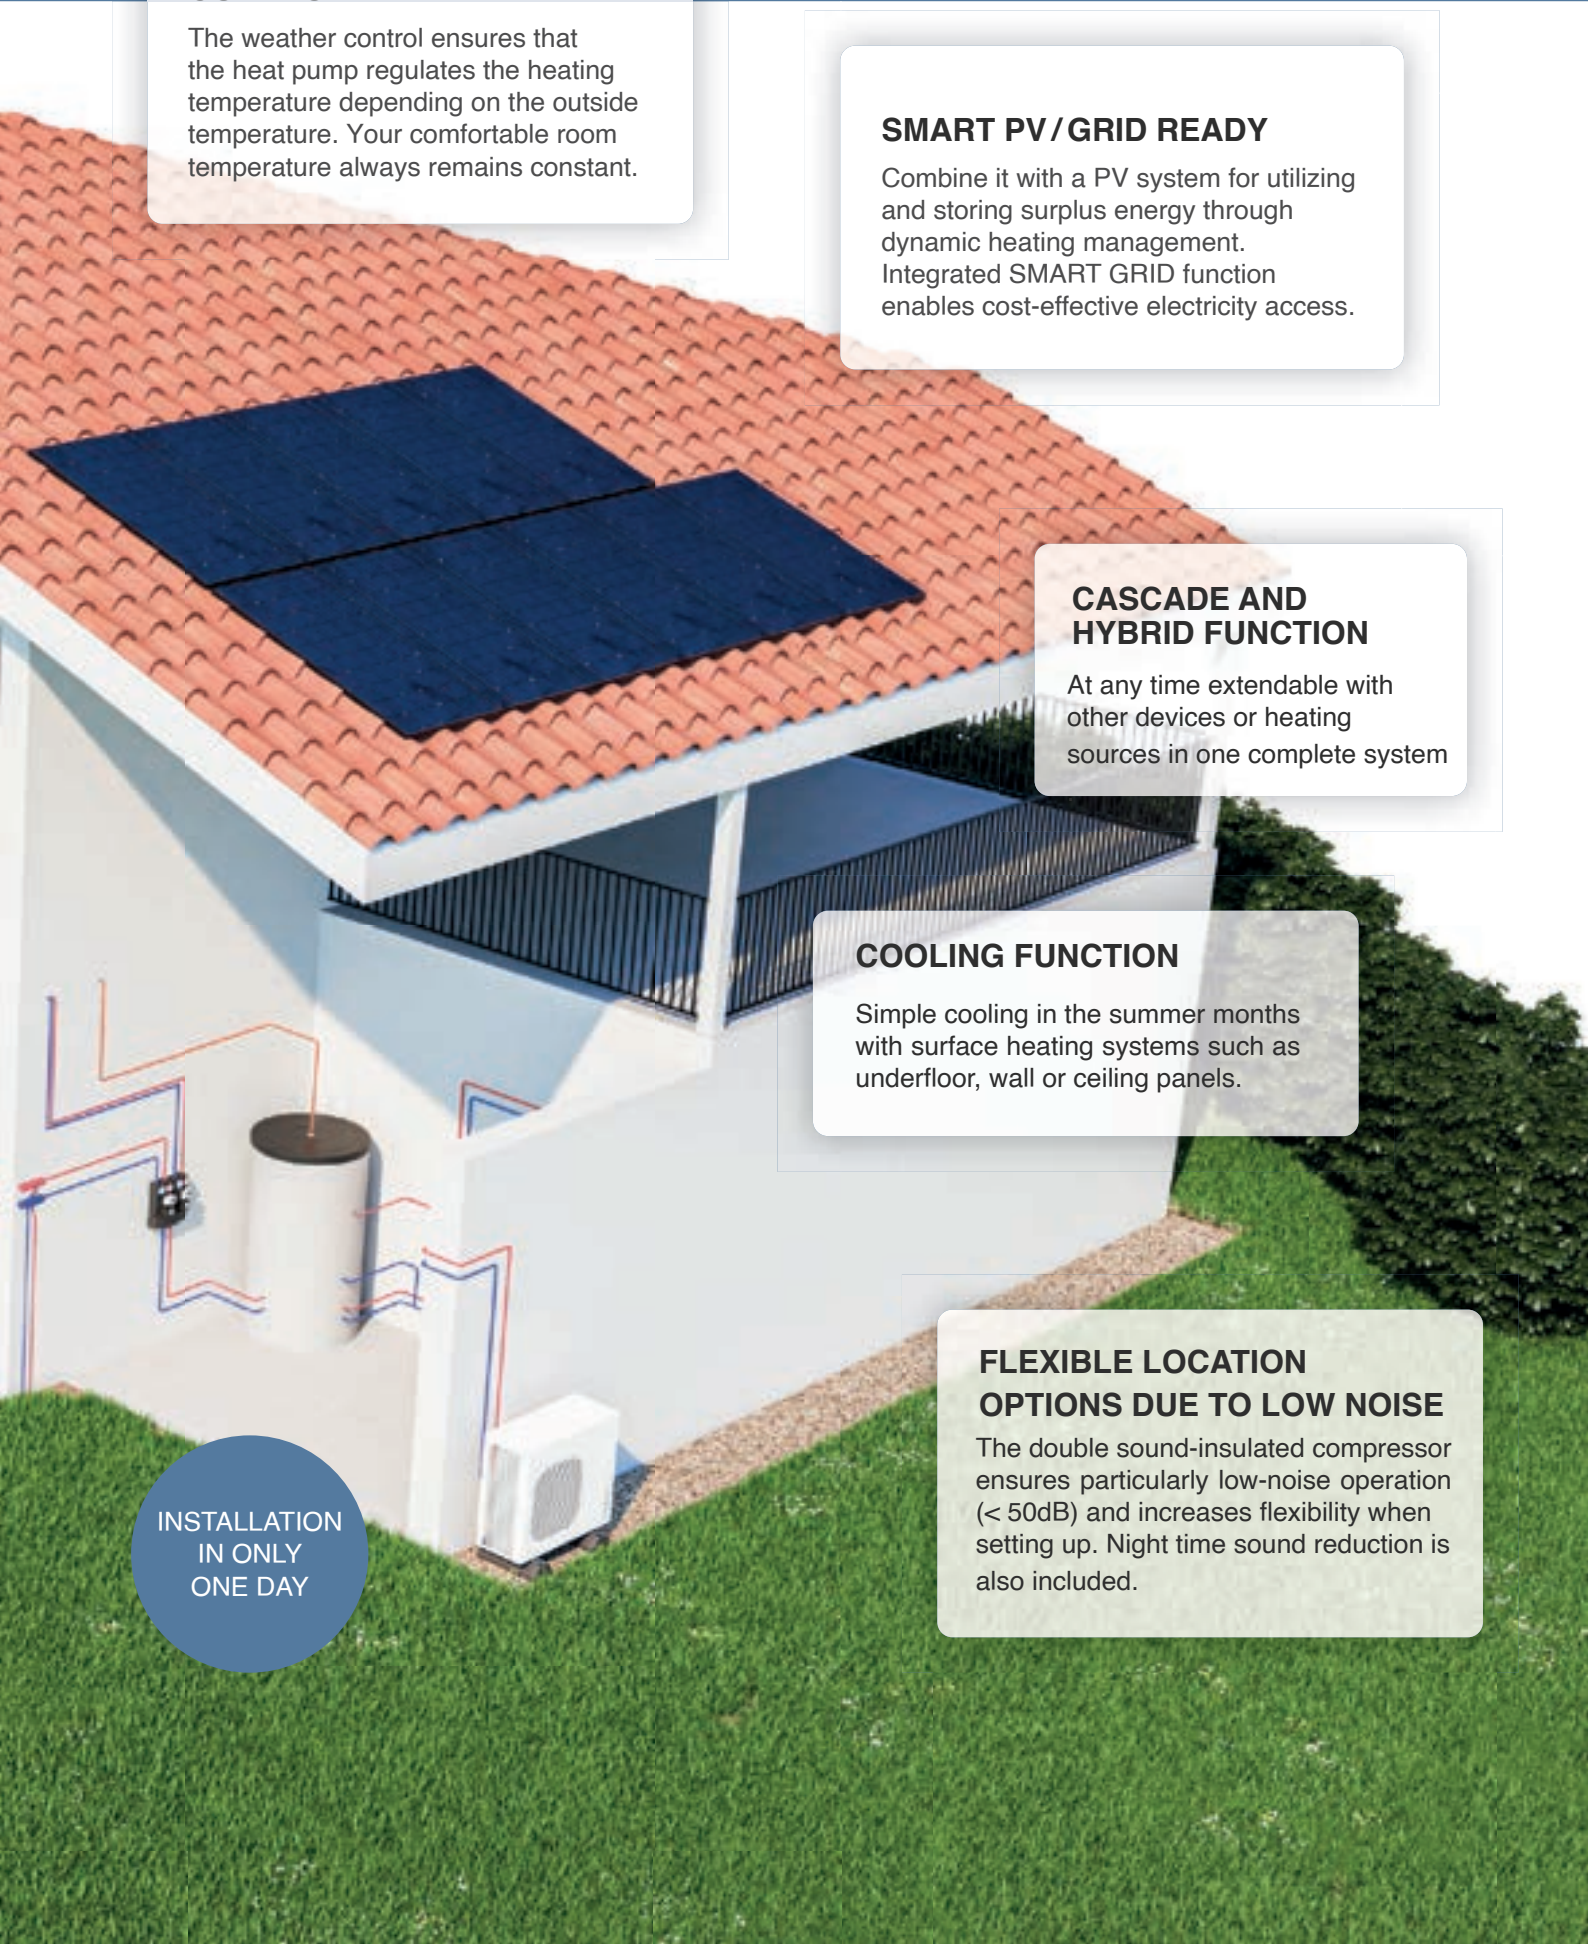



TECHNOLOGY IN DETAIL

FULL DC INVERTER TECHNOLOGY
advanced modulation control for electricity saving


ELEGANT AND EXCLUSIVE DESIGN
slim construction

ENVIRONMENTAL FRIENDLY REFRIGERANT R290 with a GWP of 3

LARGE, EFFICIENT AIR HEAT EXCHANGER

OPTIMIZED AIR FLOW
noise minimization through smart fan and air flow design

ICE-FREE DEFROST
with a miniature electric element

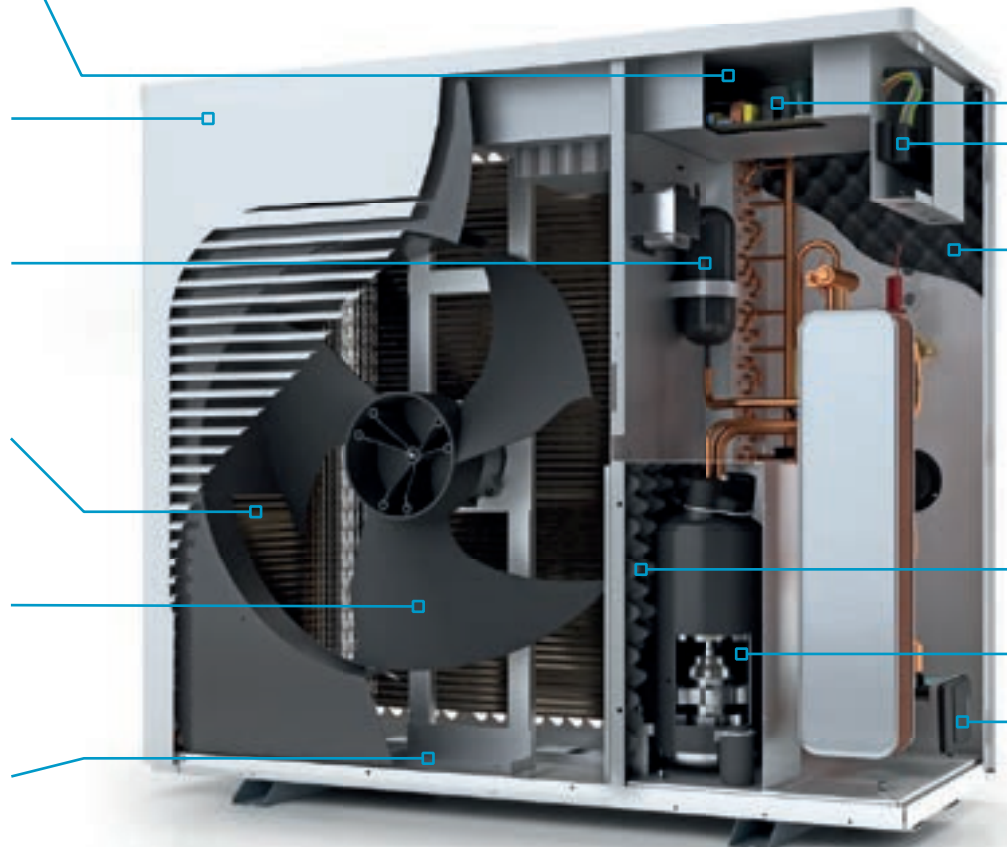

AFFORDABLE & ECO-FRIENDLY

Using ambient air as the primary heat source is a sustainable solution that is both cost-effective and climate-friendly.



EXCEPTIONALLY QUIET IN OPERATION

The use of high-quality soundproofing materials and advanced sound absorption techniques effectively minimize noise and vibration.



CLIMATE-FRIENDLY REFRIGERANT R290

The refrigerant R290 is an environmentally friendly and future-oriented solution with outstanding performance even at higher temperatures.

OUTDOOR TEMPERATURE REGULATED HEATING CIRCUIT CONTROL for optimal indoor comfort

COMBINE WITH OPTIONAL BUFFER AND HOT WATER CYLINDER for hot water and summer cooling

SPECIAL SOUNDPROOF COTTON stronger sound absorption, insulation, and reduction than standard material

DOUBLE-SOUNDPROOFED COMPRESSOR very low noise operation

MODULATION AND POWER ADJUSTMENT for higher efficiency and a longer lifetime


HIGH-EFFICIENCY PUMP INCLUDED speed-regulated with energy flow measurement



HEATING / COOLING / DHW



FREE APP WITH FULL CONTROL FROM EVERYWHERE



SMART PV/GRID READY



HIGHLY EFFICIENT PERFORMANCE

The heat pump offers flexibility in output control, allowing adjustments through modulation and cascading. It can attain high flow temperatures of up to 70 °C.



SUPPORT & SERVICE WORLDWIDE

Our worldwide partner network guarantees reliable heat: Our customer service is experienced, efficient and always quickly on site.




LONG WARRANTY PERIOD

Quality and durability are core values of our products. That's also what our 3-year system and 5 year compressor guarantee stands for.




HYDRAULICS IN PRACTICE

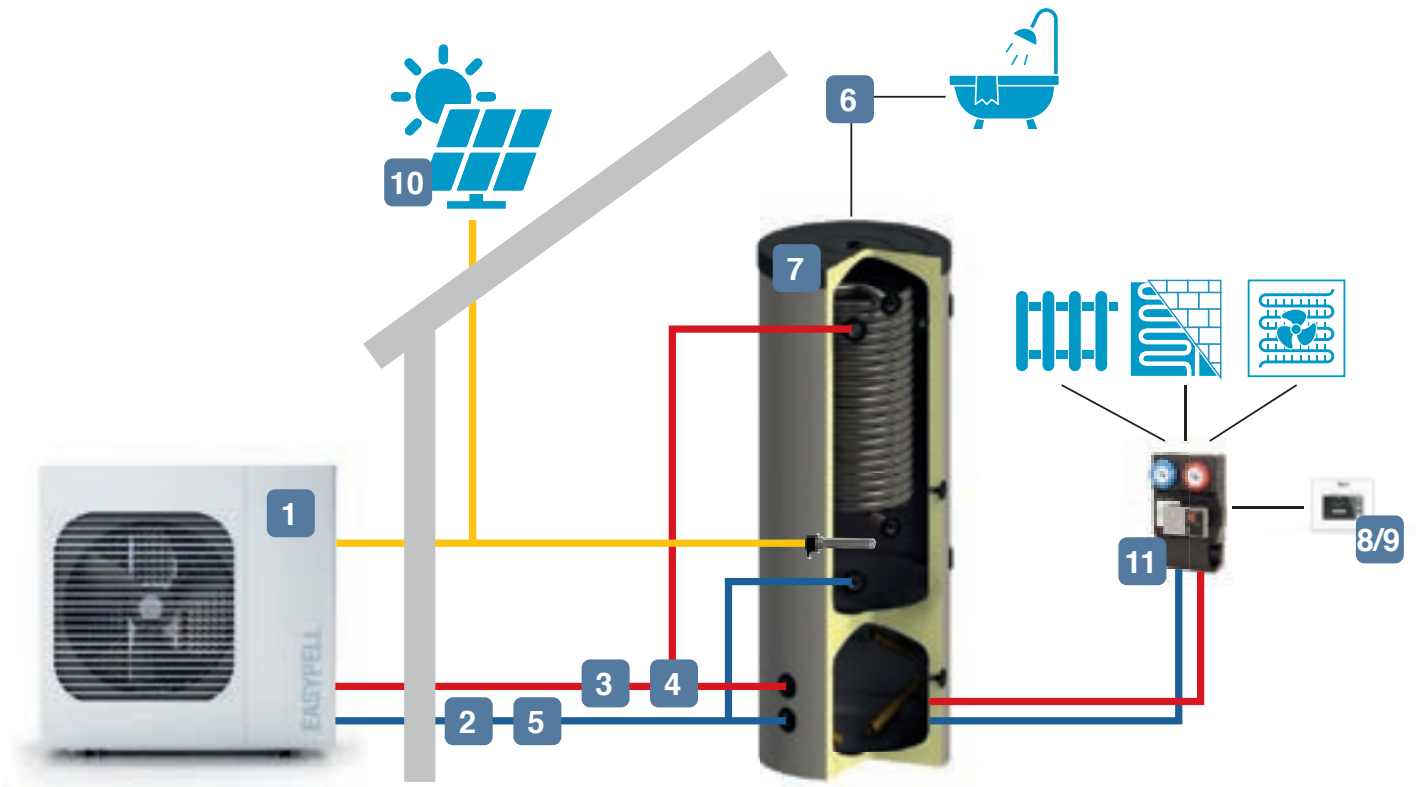





- | | | |
|-----------------------------|----------------------------|---------------------------|
| 1 Easypell Heat pump | 5 Magnetic separator | 9 Room thermostat |
| 2 Expansion vessel 25-150 l | 6 Tempering valve | 10 Inverter and PV system |
| 3 Safety unit | 7 Buffer or hot water tank | 11 Heating pump/s |
| 4 Three-way valve | 8 Heating controller | |

ONLINE FUNCTION

The free phone app provides smart and flexible online control. Adjust the settings at any time via the room controller or via the phone app. You are in control. Easily turn off and on or adjust the central heating for the whole of your home, no matter where you are. Plus, you always have access to current and historical energy consumption data.

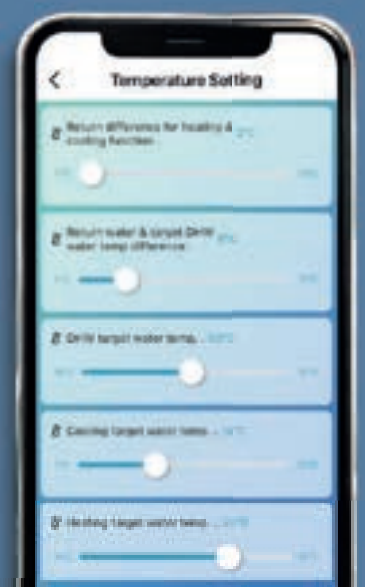

TECHNICAL DATA

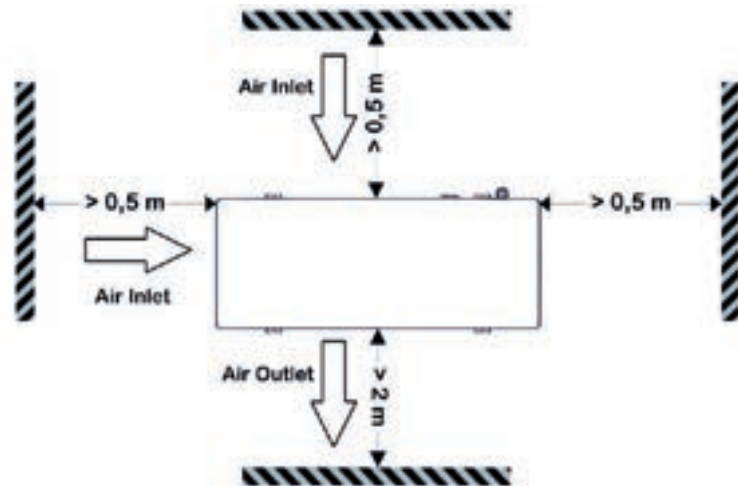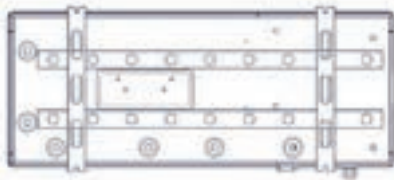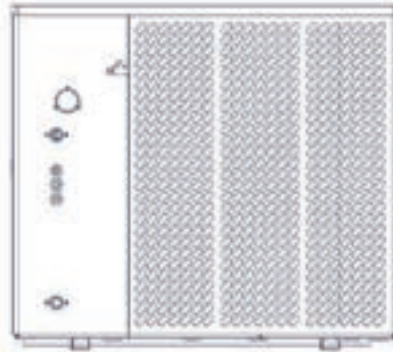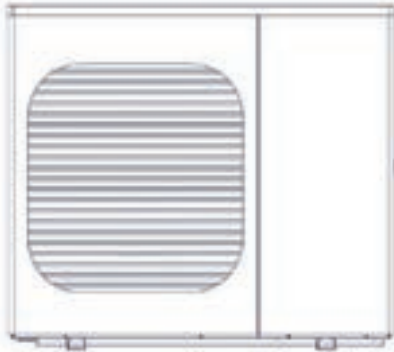

Product name		EASYPELL 06	EASYPELL 09	EASYPELL 12	EASYPELL 12T	EASYPELL 15T
Product model		EPA06	EPA09	EPA12	EPA12T	EPA17T
Heating rated power	kW A7 / W35	3,3-8,3	4,5-11,4	5,9-14,8		8,8-22,0
	kW A-2 / W35	3,0-7,3	3,7-9,3	4,9-12,0		7,3-17,9
	kW A-7 / W35	2,7-6,4	3,4-8,2	4,5-10,6		6,7-15,8
	kW A7 / W55	3,7-7,4	5,2-10,2	6,6-13,2		8,1-20,4
	kW A-2 / W55	2,8-6,7	3,5-8,6	4,5-11,2		6,8-16,6
	kW A-7 / W55	2,5-5,9	3,1-7,6	4,1-9,8		6,2-14,6
COP Range	A7 / W35	4,2-5,3				
COP Range	A7 / W55	3,1-3,8				
COP mixed (EN14.011-2)	W35 / W55	5,1 / 3,2	4,9 / 3,2	5,0 / 3,0		4,6 / 3,2
SCOP middle climate (EN14.825)	W35 / W55	4,7 / 3,5	4,5 / 3,5	4,6 / 3,4		4,7 / 3,6
Cooling rated power	kW A35 / W18	2,6-6,1	3,6-8,6	4,7-11,3		6,8-16,1
EER	A35 / W18	3,2-3,6				
ErP Level	35°C / 55°C	A+++ / A++				
ηs heating	35°C / 55°C	183 / 136	181 / 137	183 / 132		185 / 139
Refrigerant		R290				
Power supply		230V/1Ph/50Hz			380V/3Ph/50Hz	
Electrical input power	kW	0,76-2,72	0,83-3,51	1,01-4,51		1,51-6,76
Diameter of pipe / Connector	mm / inch	DN25 / F1"				
Max pump water head	m	9				
Water flow	m³/h	1,4	2,0	2,6		3,8
Sound pressure at 3m (A7/W35)	dB(A)	34	33	35	34	35
Sound power level (A7/W35)	dB(A)	58	57	60	59	60
Net Weight	kg	108	120	138		170
Net Dimension (L/W/H)	mm	1085x460x825	1085x460x965	1085x480x1065		1085x480x1378
Flow pipe height	mm		601	909		
Return pipe height	mm		131	103		
Operating ambient temp.range	°C	-25 to 43				
DHW temperature	°C	20 to 65				
Heating temperature	°C	20 to 70				
Cooling temperature	°C	7 to 35				



Apricus Eco Hot Water & Heating

2/2 Hynds Road, Tauranga
07 312 3382
info@ecohotwater.co.nz
www.ecohotwater.co.nz



Eco Engineering 2050 GmbH
Gewerbepark 1
A-4133 Niederkappel, Austria
www.easypell.com/en/heat-pump

